



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : H04J 3/16	A2	(11) International Publication Number: WO 96/10305 (43) International Publication Date: 4 April 1996 (04.04.96)
(21) International Application Number: PCT/FI95/00527 (22) International Filing Date: 26 September 1995 (26.09.95) (30) Priority Data: 944488 27 September 1994 (27.09.94) FI (71) Applicant (for all designated States except US): NOKIA TELECOMMUNICATIONS OY [FI/FI]; Mäkkylän puis- totie 1, FIN-02600 Espoo (FI). (72) Inventors; and (75) Inventors/Applicants (for US only): HÄMÄLÄINEN, Jari [FI/FI]; Matti Tapionkatu 1 F 17, FIN-33720 Tampere (FI). VAINIKKA, Jari [FI/FI]; Neilikkuja 5 B, FIN- 01300 Vantaa (FI). HONKASALO, Zhi-Chun [GB/FI]; Haravakuja 12, FIN-01660 Vantaa (FI). JOKINEN, Harri [FI/FI]; Vähähiidentie 450, FIN-25370 Hiisi (FI). POSTI, Harri [FI/FI]; Rantakatu 14 B 17, FIN-90120 Oulu (FI). (74) Agent: OY KOLSTER AB; Iso Roobertinkatu 23, P.O. Box 148, FIN-00121 Helsinki (FI).		(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TT, UA, UG, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ, UG). Published <i>Without international search report and to be republished upon receipt of that report.</i>
(54) Title: DATA TRANSMISSION METHOD IN A TDMA MOBILE COMMUNICATION SYSTEM		
(57) Abstract <div style="display: flex; justify-content: space-between;"> <div style="width: 40%;"> <p>The invention relates to a data transmission method in a time division multiple access (TDMA) mobile communication system. In a mobile communication system employing a so-called multi-slot access technique, one or more time-slots may be assigned to a mobile station (MS) for data transfer, depending on the data transfer rate required by the mobile station. In the invention, a data call is determined minimum and maximum requirements for the data transfer rate of the user data. The mobile communication network (BSS, MSC) dynamically adjusts (Handover CMD/Additional Assignment) the channel configuration assigned to the data call within the limits of the minimum and maximum requirements, depending on the varying allocation level of the network resources.</p> </div> <div style="width: 55%; text-align: center;"> <div style="display: flex; justify-content: space-around; margin-bottom: 10px;"> MS BSS (same, no chance) MSC </div> <div style="margin: 0 auto; width: 80%;"> <p>HANDOVER CMD/ ADDITIONAL ASSIGNMENT</p> <p>←</p> <p>HANDOVER COM/ ASSIGNMENT COM</p> <p>→</p> <p>HANDOVER PERFORMED</p> <p>→</p> </div> </div> </div>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LV	Latvia	SN	Senegal
CN	China	LK	Sri Lanka	TD	Chad
CS	Czechoslovakia	LU	Luxembourg	TG	Togo
CZ	Czech Republic	LV	Latvia	TJ	Tajikistan
DE	Germany	MC	Monaco	TT	Trinidad and Tobago
DK	Denmark	MD	Republic of Moldova	UA	Ukraine
ES	Spain	MG	Madagascar	US	United States of America
FI	Finland	ML	Mali	UZ	Uzbekistan
FR	France	MN	Mongolia	VN	Viet Nam
GA	Gabon				

Data transmission method in a TDMA mobile communication system

Field of the Invention

5 The invention relates to a method for data transmission in a time division multiple access (TDMA) mobile communication system, comprising the step of assigning one or more time-slots to a mobile station for data transmission depending on the data transfer rate
10 required by an application using the mobile station.

Background of the Invention

 In mobile telecommunication systems of the time division multiple access (TDMA) type, time-division communication takes place on the radio path in successive
15 TDMA frames, each of which consists of several time-slots. In each time-slot, a short information packet is sent in form of a radio frequency burst which has a finite duration and which consists of a set of modulated bits. The time-slots are mainly used for conveying control channels and traffic channels. On the traffic channels, speech and data are transmitted. On the control
20 channels, signalling between a base station and mobile subscriber stations is carried out. An example of a TDMA radio system is the Pan-European mobile communication system GSM (Global System for Mobile Communications).
25

 For communication in conventional TDMA systems, each mobile station is assigned one channel time-slot for data or speech transmission. Thus, the GSM system, for instance, may have up to eight parallel connections
30 to different mobile stations on a same carrier frequency. The maximum data transfer rate on one traffic channel is restricted to a relatively low level, depending on the available channel bandwidth, as well as the channel coding and error correction used in the
35 transmission. In the GSM system, for instance, the user

rate is 9.6 kbit/s or 12 kbit/s. In addition, in the GSM system a so-called half-rate (max. 4.8 kbit/s) traffic channel may be chosen for low speech coding rates. A half-rate channel is established when a mobile station communicates in a certain time-slot only in every second time-slot, i.e. at half-rate. A second mobile station communicates in every second time-slot of the same frame. The capacity of the system in terms of the number of subscribers may thus be doubled, in other words, up to 16 mobile stations may communicate simultaneously on the same carrier frequency.

In the last few years, the need for high-speed data services in mobile communication networks has remarkably increased. Data transfer rates of at least 64 kbit/s would be required for utilizing ISDN (Integrated Services Digital Network) circuit switched digital data services, for example. Data services of the public network PSTN, such as modems and telefax terminals of class G3, require higher transfer rates, such as 14.4 kbit/s. One of the growing areas of mobile data transfer that requires higher transfer rates than 9.6 kbit/s is the mobile video service. Services of this kind include e.g. security control by cameras, and video databases. The minimum data transfer rate in video transfer may be, for instance, 16 or 32 kbit/s.

The data transfer rates of the present mobile communication networks are not, however, adequate to satisfy these new needs.

One way to solve the problem is to use multiple TDMA time-slots for communication with a mobile station. In this way, one mobile station may transmit and receive data at higher data transfer rates by multiplexing the data to multiple time-slots (traffic channels). This is termed as multi-slot access technique.

When multiple time-slots are used for communication with one mobile station, problems arise if a sufficient number of traffic channels is not available. This may occur in the call set-up phase or in a handover. Handover refers to transferring the mobile station from one channel onto another channel of the same cell or an adjacent cell during an ongoing call. A problem arises if the mobile station is operating at a high data transfer rate, and the new cell can not provide after the handover a data transfer rate as high as that of the previous cell. One solution would be to interrupt the connection if the quality i.e. the data transfer rate of the data transfer service is not adequate in the call set-up or handover, or after the handover. However, this solution is not acceptable.

Summary of the Invention

An object of the present invention is to relieve the problems caused by capacity restrictions in a mobile communication network which employs the multi-slot access technique in data transmission.

This is achieved with the method for data transmission in a time division multiple access (TDMA) mobile communication system comprising the step of assigning one or more time-slots to a mobile station for data transmission, depending on the data transfer rate required by an application using the mobile station. The method is characterized by determining minimum and maximum requirements for the data transfer rate of the user data for the connection, and by dynamically adjusting the channel configuration consisting of one or more time-slots and assigned to the mobile station for a data call, within the limits of said minimum and maximum requirements of the data channel, depending on a varying allocation level of the resources of a mobile communication network.

In the invention, the data transfer rate of a data call is dynamically adjusted depending on the resources of the network in a mobile communication system employing a so-called multi-slot access technique, by determining minimum and maximum requirements for the transfer rate of the user data, in addition to the presently specified parameters used for establishing a data call. These requirements may include the following parameters: the required level of service (data transfer rate) and the desired level of service (data transfer rate). The desired level of service determines the data transfer rate the mobile station wishes to be able to use. Simultaneously, the desired data transfer rate is also the maximum data transfer rate to be allowed for the mobile station. The required level of service determines the minimum data transfer rate that must be provided for ensuring the continuity of data transmission. If the required data transfer rate cannot be provided, the call set-up is interrupted or the data call is interrupted. These parameters allow the mobile communication network to reduce the data transfer rate if the cell is not capable of providing the desired data transfer rate in connection with call set-up or handover. Thus, the number of calls interrupted or prevented due to the lack of resources decreases.

Instead of transferring the parameters, the mobile station may indicate said minimum and maximum requirements to the mobile communication network in a number of alternative ways, such as by indicating the level of service. The minimum and the maximum requirements used are then selected in accordance with the indicated level of service in the mobile communication network.

In accordance with the present invention, the mobile communication network is able to modify the

channel configuration of the data call and thus also the data transfer rate to a desired level once the network resources required therefor are released. In a preferred embodiment of the invention, the mobile communication network may, during a call, or after a call set-up or a handover, modify the channel configuration assigned to a data call to provide down to the minimum required data transfer rate, for releasing network resources in the mobile communication network for serving other traffic, such as new data calls.

Brief Description of the Drawings

The invention also relates to a mobile communication system for implementing the method.

In the following, the invention will be described in closer detail by way of example with the aid of the preferred embodiments of the invention and with reference to the attached drawings, in which

Figure 1 illustrates a part of the mobile communication system in which the method of the invention may be applied, and

Figures 2, 3, 4 and 5 illustrate the TDMA frame structure,

Figures 6, 7 and 8 are signalling diagrams, which are correspondingly connected with call set-up, handover, and the adjustment of the data transfer rate carried out during a call in accordance with the invention.

The Preferred Embodiments of the Invention

The present invention may be applied to high-speed data transfer in most digital TDMA based mobile communication systems, such as the Pan-European digital mobile communication system GSM, DCS1800 (Digital Communication System), UMTS (Universal Mobile Telecommunication System), FPLMTS (Future Public Land Mobile Telecommunication System), etc.

Figure 1 describes a mobile communication system of the same type as GSM by way of example. GSM (Global System for Mobile Communications) is a pan-European mobile communication system. Figure 1 shows very briefly the basic structure of the GSM system, not paying closer attention to its characteristics or other aspects of the system. The GSM system is described in greater detail in GSM recommendations and in "The GSM System for Mobile Communications", M. Mouly & M. Pautet, Palaiseau, France, 1992, ISBN:2-9507190-0-7, which are incorporated herein by reference.

A mobile services switching centre (MSC) is in charge of switching incoming and outgoing calls. It performs similar operations as the exchange of a public switched telephone network (PSTN). In addition, it also performs operations typical of mobile telecommunication only, such as subscriber location management, jointly with the subscriber registers of the network. The GSM system contains at least such subscriber registers as home location register (HLR) and visitor location register (VLR), which are not shown in Figure 1. Specific information on the location of the subscriber, such as the location area, are stored in a visitor location register VLR, the number of which is typically one per each mobile services switching centre (MSC). The location data in the HLR, in turn, indicates the VLR within the area of which a mobile station MS is located. Mobile stations MS are switched to the MSC by means of base station systems. A base station system BSS comprises a base station controller BSC and base stations BTS. One BSC is used for controlling several BTSs. The tasks of the BSC include e.g. handovers in such cases in which handover is performed within a base station or between two base stations both controlled by the same BSC. Figure 1 shows for clarity one base

station system only, in which a base station controller BSC is connected with nine base stations BTS1-BTS9, having coverages which, in turn, provide corresponding radio cells C1-C9.

5 The GSM system is a time division multiple access (TDMA) method in which time-division traffic takes place on the radio path in successive TDMA frames each of which consists of several time-slots. In each time-slot, a short information packet is sent in form
10 of a radio frequency (RF) burst which has a finite duration and which consists of a set of modulated bits. The time-slots are mainly used for conveying control channels and traffic channels. On the traffic channels, speech and data are transmitted. On the control
15 channels, signalling between a base station and mobile subscriber stations is carried out.

Channel structures used in the radio interface of the GSM system are defined in closer detail in the ETSI/GSM recommendation 05.02. The TDMA frame structure
20 of the GSM system is illustrated by way of example in Figures 2-5. Figure 5 shows one TDMA basic frame which includes eight time-slots 0-7 used as traffic channels or control channels. Only one RF burst shorter than the duration of the time-slot is thus transmitted in each
25 time-slot. Once one TDMA basic frame ends in time-slot 7, the time-slot 0 of the following basic frame immediately begins. Thus, 26 or 51 successive TDMA frames form one multiframe depending on whether a traffic channel or a control channel structure is in
30 question, as illustrated in Figure 4. A superframe, in turn, consists of 51 or 26 successive multiframe depending on whether the multiframe have 26 or 51 frames, as illustrated in Figure 3. A hyperframe consists of 2048 superframes, as illustrated in Figure
35 2.

5 In normal operation, a mobile station MS is assigned at the beginning of a call one time-slot as a traffic channel from one of the carrier frequencies (single-slot access). The mobile station is synchronized with the assigned time-slot for transmitting and receiving RF bursts.

10 In data transfer in accordance with the invention, when a mobile station MS requires a data transfer rate higher than can be provided by one traffic channel for transmission of user data, said MS is assigned a channel or a time-slot configuration that comprises two or more time-slots from one or more time-slots in one or several frames by means of a so-called multi-slot access technique. It is not essential to the present invention which multi-slot access technique is used. An example of a multi-slot access technique for which the present invention is well suited is disclosed in PCT/FI95/00248 and PCT/FI95/00249. In these applications, a high-speed signal is multiplexed to several low-speed channels (time-slots), transferred over the radio path and demultiplexed in a receiver back to one signal. These documents are incorporated herein by reference.

25 As it has been stated previously, however, problems arise in connection with the multi-slot access technique if there is not a sufficient number of channels available. This may occur in the call set-up phase and also in connection with handover.

30 In accordance with the present invention, the minimum and the maximum requirements for the data transfer rate of user data are indicated by the mobile station to the mobile communication network at the beginning of call set-up. Said requirements are two new parameters, in addition to the presently specified parameters used for establishing a data call. Indicating

35

the requirements to the mobile communication network refers herein to all the manners in which the mobile station can indicate the minimum and the maximum requirements, without limiting e.g. to direct transmission of the requirements as such. For example, the mobile station may indicate a desired level of service, in which case the MS is provided at least the performance of the data channel defined by the minimum requirement for this level of service, but not more than the performance of the data channel defined by the maximum requirement for this level of service.

In the following examples, these minimum and maximum requirements are defined with parameters "required level of service" and "desired level of service", but the requirements may be defined in other ways, as well. The desired level of service determines the data transfer rate, i.e. the channel configuration provided by one or more traffic channels or time-slots that the mobile station wishes to be able to use. Simultaneously, this desired data transfer rate is also the maximum data transfer rate to be allowed to the mobile station. The required level of service determines the minimum data transfer rate that must be provided for ensuring the continuity of data transfer. With the aid of these parameters, the mobile communication network may, depending on the resources of the network, assign a data call a data transfer rate which is within the limits of the desired data transfer rate and the required data transfer rate. Provided that not even the minimum data transfer rate can be provided, the data call or the call set-up is interrupted. It is also possible in some situations that the specific requirements set by the mobile station for the minimum level of service and the minimum data transfer rate are optional, i.e. the MS does not give any specific rate,

but leaves the minimum performance to be freely chosen by the mobile communication network.

5 In accordance with the invention, the data transfer rate assigned to the mobile station for a data call is dynamically adjusted within the limits of the required data transfer rate and the desired data transfer rate depending on the resources of the mobile communication network. The mobile communication network may, in connection with call set-up or handover, assign
10 the data call a smaller time-slot configuration, i.e. less time-slots than the maximum requirement for the data transfer rate if the network resources are not available for providing a desired channel configuration, and thus a desired data transfer rate at that particular moment. The required network resources may, however, be
15 released and available later, in which case it would be possible to move over to a higher data transfer rate.

For this reason, the mobile communication network of the invention modifies the channel
20 configuration, and thus the data transfer rate of the data call to a desired level of service when the resources required therefor are released and available later in the same cell. In a preferred embodiment of the invention, the mobile communication network may, during
25 a call, even after a call set-up or a handover, reduce the channel configuration assigned to a data call, however, only down to the channel configuration corresponding to the minimum requirements for the transfer rate of user data, for releasing resources in
30 the mobile communication network for serving other traffic.

In the following, the invention will be described in closer detail by way of example, in connection with handover within a base station system
35 BSS (Figure 7) and adjustment of the data transfer rate

carried out during a call (Figure 8). Other typical handover situations, which are not paid closer attention to herein, are handover between base station systems BSS as well as handover between mobile services switching centres MSC.

Figure 6 shows, in connection with call set-up, only the signalling that is essential to disclosing the invention. It must be noted, however, that in addition to the described signalling messages, other messages are also transmitted in connection with the call set-up, which are not shown herein for clarity, however. As to the GSM system, for instance, this signalling is precisely defined in the GSM specifications concerning call set-up.

In Figure 6, normal call set-up signalling takes place first, whereafter the MS sends a call set-up message SETUP, which is forwarded to the MSC. In accordance with the invention, the SETUP message contains, in addition to the parameters normally required for setting up a data connection, two new parameters, the maximum desired data transfer rate DRMAX and the minimum required data transfer rate DRMIN. In the SETUP message of the GSM system, these parameters may be included in a Bearer Capability Information Element BCIE. The BCIE is disclosed in the GSM recommendation 04.08, version 4.7.0, pages 435-443. The MSC sends a serving BSC an assignment request message (Assignment REQ), which is modified to contain parameters DRMAX and DRMIN. The BSC checks whether it has a sufficient capacity for serving the data call, and assigns the data call, depending on the current capacity, some time-slot configuration corresponding to the data transfer rate, which is within the limits of parameters DRMAX and DRMIN. Thereafter, the BSC sends the BTS serving the MS an assignment command message

(Assignment Command), which contains the information on the time-slots assigned to the data call and on the assigned data transfer rate. The BTS sends the MS an assignment command message (Assignment Command), which
5 contains the information on the time-slots assigned to the data call and on the assigned data transfer rate. The MS starts to prepare for data transfer in the assigned time-slots at the assigned data transfer rate, and sends the BTS an assignment acknowledgement (Assignment Complete). The BTS sends the BSC an
10 acknowledgement (Assignment Complete). The BSC, in turn, sends the MSC an assignment acknowledgement (Assignment Complete), which contains the information on the data transfer rate assigned to the data call by the BSC. After this, normal call set-up signalling takes place
15 for starting the transfer.

If the base station controller BSC is not capable of assigning the data call the time-slot configuration corresponding to the minimum required data
20 transfer rate DRMIN due to lack of network resources, it will send a report to the MSC, in form of an Assignment Failure message. Then the MSC interrupts the call set-up. The network resources that determine the data transfer rate to be assigned to the data call
25 include at least the traffic channels, i.e. the time-slots that are available at the BTS serving the MS at that particular moment.

Figure 7 shows only the signalling that is essential to disclosing the invention. However, it must
30 be noticed that in addition to the signalling messages described above, other messages are also sent in a handover situation, although these messages are not described herein for clarity. As to the GSM system, for instance, this signalling is precisely defined in the
35 GSM specifications concerning call set-up.

In the intra-BSS handover illustrated in Figure 7, the MS regularly reports the measurement results of the downlink signals of the adjacent cells to the BSC of the serving BSS (Meas Report). The BSC makes the handover decisions on the basis of the criteria of the radio path by utilizing these measurements, or for other reasons, such as for distributing the capacity. After making the handover decision, the BSC assigns the data call, depending on at least the time-slot resources of the target cell of the handover, a channel configuration that provides a data transfer rate which is at least the minimum required data transfer rate DRMIN and not higher than the maximum desired data transfer rate DRMAX. The data transfer rate (time-slot configuration) provided by the new cell is not necessarily the same as that provided by the previous cell. In other words, the data transfer rate may increase or reduce in the new cell in accordance with the available resources and within the limits of parameters DRMAX and DRMIN. Either the BSC or the BTS stores parameters DRMAX and DRMIN for every MS that is located within their area and has an ongoing high-speed data call. Provided that the minimum required data transfer rate cannot be provided, the call or the handover attempt will be interrupted, and an adjacent cell, second best in terms of other criteria and able to provide an adequate data transfer rate, will be selected as the new target cell for handover. The BSC sends the MS a handover command message (Handover Command), which contains the information on the assigned data transfer rate, and the description of the assigned time-slots. Now the MS is able to start communication with the channel configuration assigned in the new cell, and it sends an acknowledgement (Handover Completed) to the BSS. The BSS, in turn, sends the message Handover Performed to the MSC.

Figure 8 illustrates the adjustment of the data transfer rate during a call in accordance with the invention. The BSS detects that there are free time-slot resources available in the BSS for a data call the current channel configuration (the number of time-slots) and the corresponding data transfer rate of which are lower than the desired channel configuration, and the corresponding maximum desired data transfer rate DRMAX of the MS. In that case, the BSS commands the MS to use a higher data transfer rate and a number of time-slots, by means of an intra-BTS handover or a new channel assignment. In other words, the BSS assigns the data call a new channel configuration in the same cell and sends the MS a handover command message (Handover Command) or an additional channel assignment message (Additional Assignment), containing the information on the assigned data transfer rate and the description of the assigned time-slots. Now the MS is able to start communication with the new, assigned channel configuration in the same cell, and it sends an acknowledgement Handover Complete (or Assignment Complete) to the BSS. The BSS, in turn, sends the Handover Performed message to the MSC.

Correspondingly, it is possible to reduce the channel configuration (number of time-slots), and thus the data transfer rate of the data calls, but, only down to the minimum requirement for the user data transfer rate of each data call, when the BSS detects that time-slots are needed for other traffic in the cell. The BSS then assigns the data call a new channel configuration and reports it to the MS as described above with reference to Figure 8. The channel configurations assigned to data calls may be adjusted e.g. so that the mobile communication network is able to serve as many connection requests as possible, while simultaneously

15

keeping the channel configuration assigned to each data call as high as possible within the limits of said minimum and maximum requirements.

5 The figures and the explanation associated therewith are only intended to illustrate the present invention. The method of the invention may vary in its details within the scope of the attached claims.

10

15

20

25

30

35

Claims:

1. A data transmission method in a time division multiple access (TDMA) mobile communication system, comprising the step of assigning one or more time-slots to a mobile station for data transmission, depending on the data transfer rate required by an application using the mobile station, characterized by

determining a data call minimum and maximum requirements for the user data transfer rate,

dynamically adjusting the channel configuration consisting of one or more time-slots and assigned to the mobile station for a data call within the limits of said minimum and maximum requirements of the data channel, depending on a varying allocation level of network resources of a mobile communication network.

2. A method as claimed in claim 1, characterized by adjusting the channel configurations assigned to the data calls, so that the mobile communication network is able to serve as many requested connection requests as possible while simultaneously keeping the channel configuration assigned to each data call as high as possible within the limits of said minimum and maximum requirements.

3. A method as claimed in claim 1 or 2, characterized by increasing the channel configuration assigned to the data call to a level lower than or equal to the maximum requirement, after a call set-up or a handover when there are network resources available in the serving mobile communication network.

4. A method as claimed in claim 1 or 2, characterized by decreasing the channel configuration assigned to the data call to a level higher than or equal to said

minimum requirement, after a call set-up or a handover for releasing resources in the mobile communication network for serving other traffic.

5 5. A method as claimed in any of the claims 1-4, c h a r a c t e r i z e d in that said resources of the mobile communication network depending on which the channel configuration assigned to the data call is adjusted, include time-slot resources of a serving cell, time-slot resources of a handover target cell, or both.

10 6. A method as claimed in any of the claims 1-5, c h a r a c t e r i z e d in that the step of adjusting the assigned channel configuration during the data call comprises the steps of:

15 detecting that there are time-slot resources available in a cell,

 detecting in said cell at least one data call the assigned channel configuration of which does not meet the maximum requirement for the data transfer rate,

20 assigning said at least one data call a higher channel configuration,

 sending from the base station system to the mobile station a handover command message or an additional channel assignment message containing the information on the assigned channel configuration in
25 said cell.

 7. A method as claimed in any of the claims 1-5, c h a r a c t e r i z e d in that the step of adjusting the assigned channel configuration during the data call comprises the steps of:

30 detecting a lack of free time-slots in a cell,

 detecting in said cell at least one data call the assigned channel configuration of which is higher than the minimum requirement for the data transfer rate,

35 assigning said at least one data call a lower channel configuration,

18

5 sending from the base station system to the
mobile station a handover command message or an
additional channel assignment message containing the
information on the assigned channel configuration in
said cell.

8. A mobile communication system for
implementing a method as claimed in any of the claims
1-7.

10


15

20

25

30

35

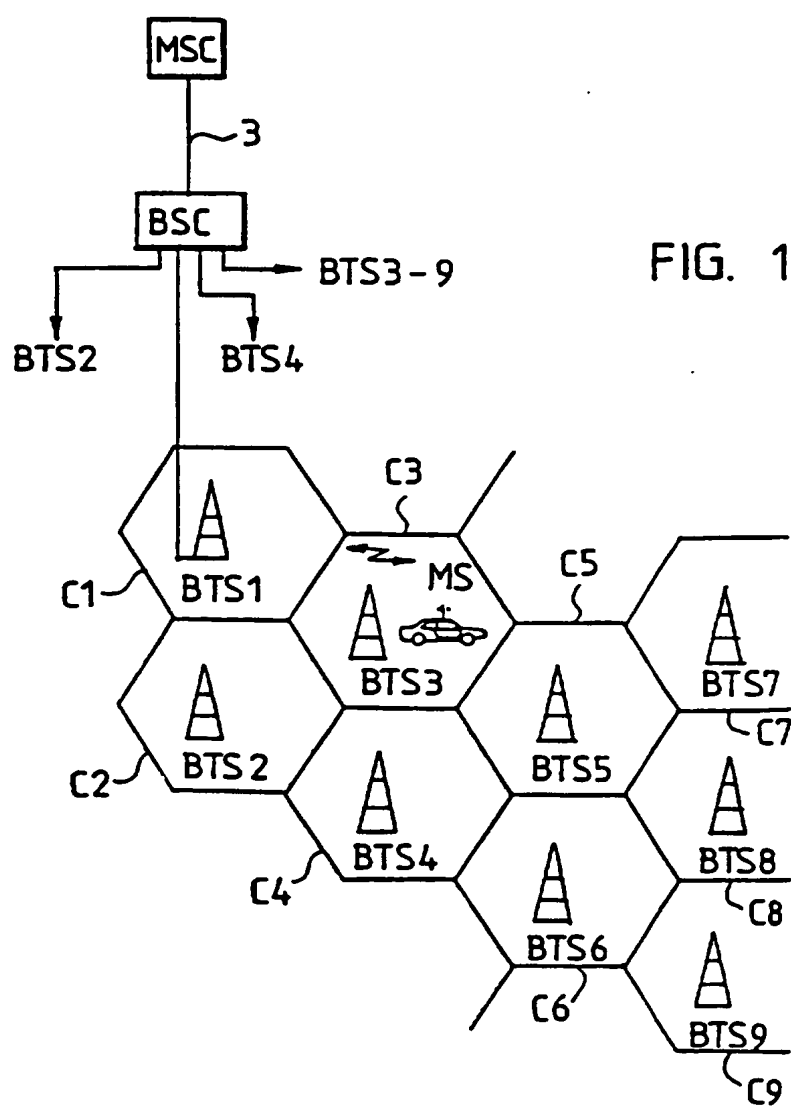

2/3




FIG. 2




FIG. 3




FIG. 4




FIG. 5

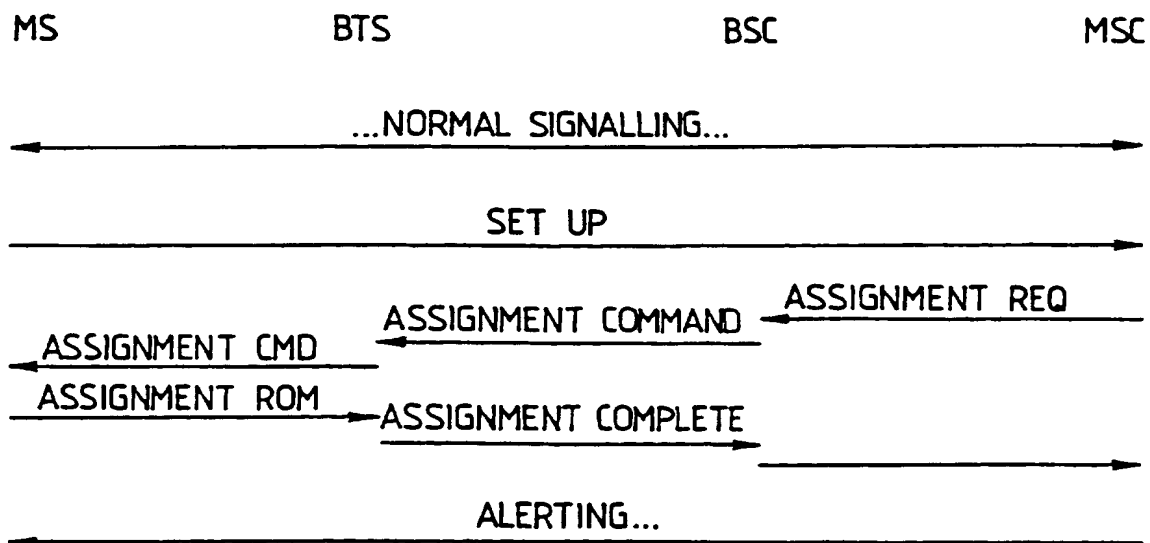


FIG. 6

3/3

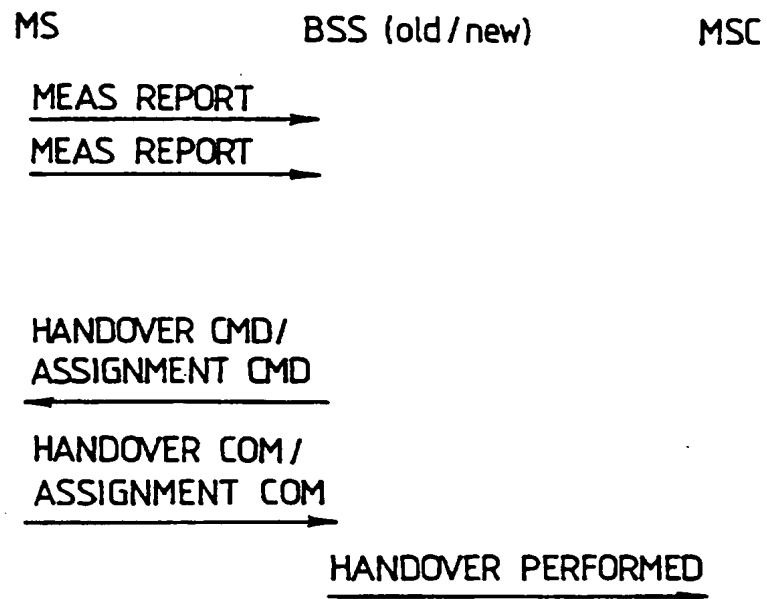


FIG. 7

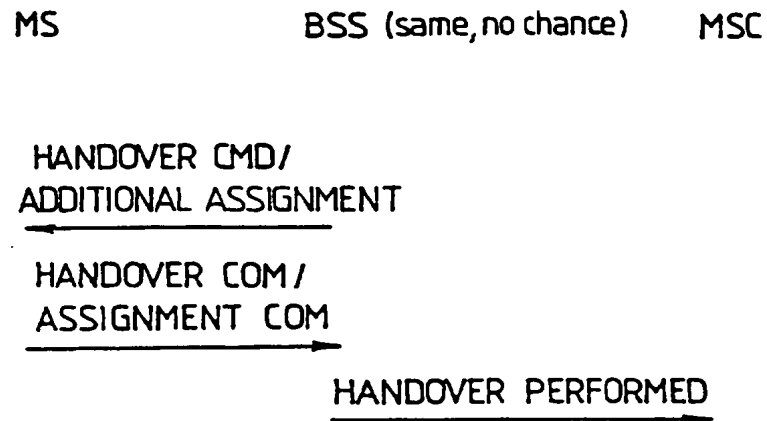


FIG. 8



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶: H04J 3/16	A3	(11) International Publication Number: WO 96/10305 (43) International Publication Date: 4 April 1996 (04.04.96)		
(21) International Application Number: PCT/FI95/00527 (22) International Filing Date: 26 September 1995 (26.09.95) (30) Priority Data: 944488 27 September 1994 (27.09.94) FI (71) Applicant (for all designated States except US): NOKIA TELECOMMUNICATIONS OY [FI/FI]; Mäkkylän puisto- tie 1, FIN-02600 Espoo (FI). (72) Inventors; and (75) Inventors/Applicants (for US only): HÄMÄLÄINEN, Jari [FI/FI]; Matti Tapionkatu 1 F 17, FIN-33720 Tampere (FI). VAINIKKA, Jari [FI/FI]; Neilikkuja 5 B, FIN- 01300 Vantaa (FI). HONKASALO, Zhi-Chun [GB/FI]; Haravakuja 12, FIN-01660 Vantaa (FI). JOKINEN, Harri [FI/FI]; Vähähiidentie 450, FIN-25370 Hiisi (FI). POSTI, Harri [FI/FI]; Rantakatu 14 B 17, FIN-90120 Oulu (FI). (74) Agent: OY KOLSTER AB; Iso Roobertinkatu 23, P.O. Box 148, FIN-00121 Helsinki (FI).		(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TT, UA, UG, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ, UG). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the</i> <i>claims and to be republished in the event of the receipt of</i> <i>amendments.</i> (88) Date of publication of the international search report: 23 May 1996 (23.05.96)		
(54) Title: DATA TRANSMISSION METHOD IN A TDMA MOBILE COMMUNICATION SYSTEM				
(57) Abstract				
<p>The invention relates to a data transmission method in a time division multiple access (TDMA) mobile communication system. In a mobile communication system employing a so-called multi-slot access technique, one or more time-slots may be assigned to a mobile station (MS) for data transfer, depending on the data transfer rate required by the mobile station. In the invention, a data call is determined minimum and maximum requirements for the data transfer rate of the user data. The mobile communication network (BSS, MSC) dynamically adjusts (Handover CMD/Additional Assignment) the channel configuration assigned to the data call within the limits of the minimum and maximum requirements, depending on the varying allocation level of the network resources.</p>			<div style="display: flex; justify-content: space-between; align-items: center;"> MS BSS (same, no chance) MSC </div> <div style="margin-top: 20px;"> <p style="text-align: center;">HANDOVER CMD/ ADDITIONAL ASSIGNMENT</p> <p style="text-align: center;">←</p> <p style="text-align: center;">HANDOVER COM/ ASSIGNMENT COM</p> <p style="text-align: center;">→</p> <p style="text-align: center;">HANDOVER PERFORMED</p> <p style="text-align: center;">→</p> </div>	

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Benin	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 95/00527

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: H04J 3/16

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H04Q, H04J, H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 0332818 A2 (MOTOROLA, INC.), 20 Sept 1989 (20.09.89), column 12, line 3 - line 30 --	1-4,8
Y	US 4949395 A (RYDBECK), 14 August 1990 (14.08.90), abstract --	1-4;8
A	EP 0615393 A1 (MOTOROLA, INC.), 14 Sept 1994 (14.09.94), column 9, line 36 - column 10, line 41 --	1,8
A	CA 2112762 A1 (KABUSHIKI KAISHA TOSHIBA), 7 July 1994 (07.07.94), page 2, line 19 - page 3, line 28 -- -----	1,8



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

2 April 1994

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Date of mailing of the international search report

09 -04- 1996

Authorized officer

Göran Magnusson
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

05/02/96

International application No.

PCT/FI 95/00527

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A2- 0332818	20/09/89	CA-A- 1309480 JP-A- 1274524 JP-B- 7105975 US-A- 4887265	27/10/92 02/11/89 13/11/95 12/12/89
US-A- 4949395	14/08/90	AU-B- 634792 AU-A- 5872390 CA-A, C- 2020625 EP-A, A, A 0407367 JP-A- 3046424	04/03/93 10/01/91 08/01/91 09/01/91 27/02/91
EP-A1- 0615393	14/09/94	NONE	
CA-A1- 2112762	07/07/94	NONE	

Form PCT/ISA/210 (patent family annex) (July 1992)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ **BLACK BORDERS**

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☐ **FADED TEXT OR DRAWING**

☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

This Page Blank (uspto)